

INTERNATIONAL SEARCH REPORT

Information on patent family members

International

Publication No

PCT/GB 03/04330

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
CH 225028	A	31-12-1942	NONE	
EP 0320956	A	21-06-1989	JP 1163492 A	27-06-1989
			JP 2515831 B2	10-07-1996
			DE 3879423 D1	22-04-1993
			DE 3879423 T2	24-06-1993
			EP 0320956 A2	21-06-1989
			KR 9306375 B1	14-07-1993
			US 4984974 A	15-01-1991
JP 10299676	A	10-11-1998	NONE	
US 5443644	A	22-08-1995	NONE	
US 5924855	A	20-07-1999	DE 19522557 A1	02-01-1997
			DE 19522559 A1	02-01-1997
			AT 187528 T	15-12-1999
			DE 59603870 D1	13-01-2000
			DK 834018 T3	13-06-2000
			WO 9701038 A1	09-01-1997
			EP 0834018 A1	08-04-1998
			ES 2141515 T3	16-03-2000
			GR 3032683 T3	30-06-2000
			JP 11508015 T	13-07-1999
			KR 2000000512 A	15-01-2000
			PT 834018 T	31-05-2000
JP 60017283	A	29-01-1985	NONE	
US 5046934	A	10-09-1991	EP 0365695 A1	02-05-1990
			DE 3876243 D1	07-01-1993
			JP 2153292 A	12-06-1990
US 6224326	B1	01-05-2001	FR 2783883 A1	31-03-2000
			EP 0985828 A1	15-03-2000
US 2002141882	A1	03-10-2002	US 6398518 B1	04-06-2002
			BR 0101217 A	30-10-2001
			CA 2342033 A1	29-09-2001
			EP 1138955 A2	04-10-2001
			JP 2001317495 A	16-11-2001
EP 0879964	A	25-11-1998	JP 10318168 A	02-12-1998
			EP 0879964 A1	25-11-1998
			TW 389812 B	11-05-2000
			US 6126425 A	03-10-2000
US 4400891	A	30-08-1983	US 4295895 A	20-10-1981
DE 19820622	A	11-11-1999	DE 19820622 A1	11-11-1999

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International

Location No

PCT/GB 03/04330

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 879 964 A (T D ENGINEERING CO LTD) 25 November 1998 (1998-11-25) figures 4-6 column 1, line 10 - line 16 column 1, line 40 - line 57 column 6, line 15 - line 31 claims 5,6</p> <p>---</p>	<p>7-9, 11, 12, 21, 38</p>
A	<p>US 4 400 891 A (KONGSHAUG GUNNAR) 30 August 1983 (1983-08-30) figure 3 column 3, line 48 - line 50</p> <p>---</p>	<p>16, 29, 34</p>
A	<p>DE 198 20 622 A (FRIEDEN PETER) 11 November 1999 (1999-11-11) figure 1 claim 1</p> <p>-----</p>	<p>9</p>

INTERNATIONAL SEARCH REPORT

Internati

lication No

PCT/GB 03/04330

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 02, 26 February 1999 (1999-02-26) -& JP 10 299676 A (KOBE STEEL LTD), 10 November 1998 (1998-11-10) abstract figures 1,4,6,8 ---	1-6, 12-20, 22-34
X	US 5 443 644 A (OZAWA OSAMU) 22 August 1995 (1995-08-22) ---	18-21, 31-34, 39-41
A	figures 1-3 column 7, line 14 - line 67 ---	9,12-14, 17,26-30
X	US 5 924 855 A (DAHMLLOS CHRISTIAN ET AL) 20 July 1999 (1999-07-20) ---	1-9, 13-34
A	figure 1 column 3, line 5 - line 8 column 3, line 57 -column 4, line 32 column 5, line 59 -column 6, line 30 ---	35,36
X	PATENT ABSTRACTS OF JAPAN vol. 009, no. 135 (M-386), 11 June 1985 (1985-06-11) -& JP 60 017283 A (KOBE SEIKOSHO KK), 29 January 1985 (1985-01-29) abstract figures 1-4 ---	1,5-9, 13-22, 26-34
A		35,36
X	US 5 046 934 A (BERGES HANNS-PETER) 10 September 1991 (1991-09-10) figures 1,2 column 2, line 67 -column 3, line 7 ---	1,2,5,6, 11,13-20
X	US 6 224 326 B1 (PUECH MICHEL) 1 May 2001 (2001-05-01) ---	1-6,15, 17-25, 28, 30-36, 39-41
	figure 1 column 1, line 29 - line 43 column 4, line 19 - line 39 claim 10 ---	
X	US 2002/141882 A1 (MCVEY DENNY L ET AL) 3 October 2002 (2002-10-03) figures 1-3,5 page 2, paragraph 26 page 3, paragraph 32 - paragraph 33 ---	1-6, 13-36, 39-41
	--- -/--	

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/GB 03/04330

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F04C29/00 F04C29/10 F04C25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F04C F04D H01L C23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EP0-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CH 225 028 A (BRAUNSTEIN WILHELM) 31 December 1942 (1942-12-31) figures 1,2 page 1, line 25 -page 2, line 62 ---	1-8, 13-20, 22-34
X	EP 0 320 956 A (HITACHI LTD) 21 June 1989 (1989-06-21) figures 1,4,6 column 1, line 30 - line 42 column 2, line 18 - line 35 column 3, line 52 - line 55 column 5, line 39 -column 6, line 40 --- -/--	1-10, 13-34

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

9 January 2004

Date of mailing of the international search report

15/01/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lequeux, F

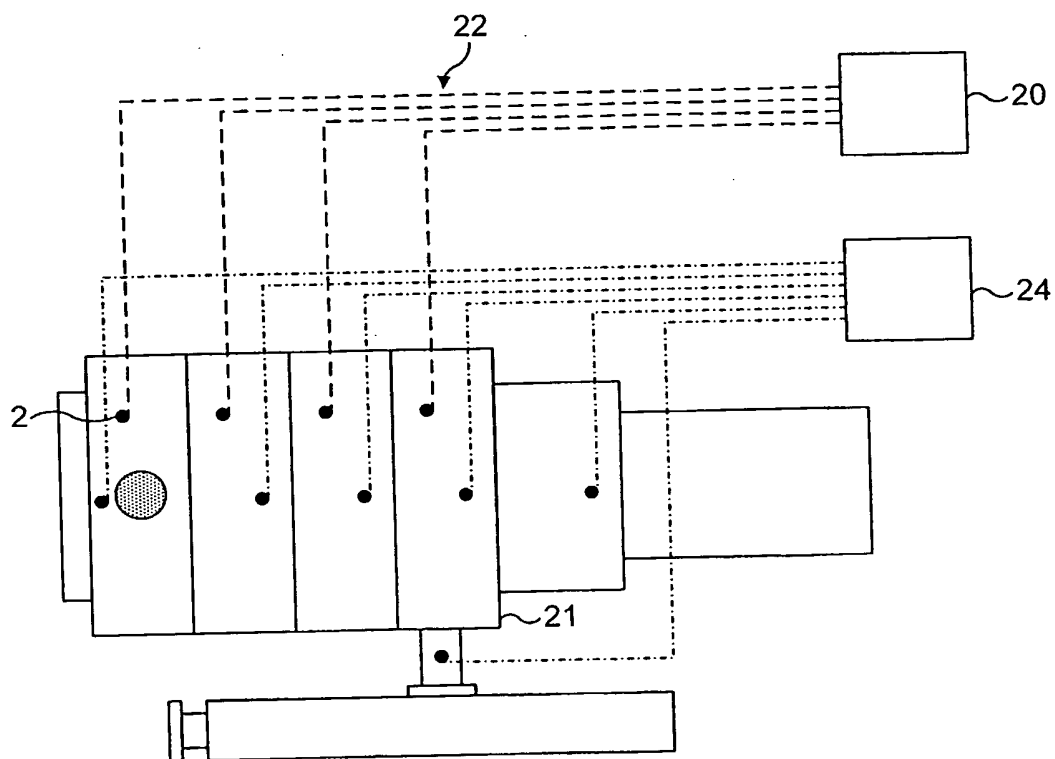


FIG. 5

2 / 3

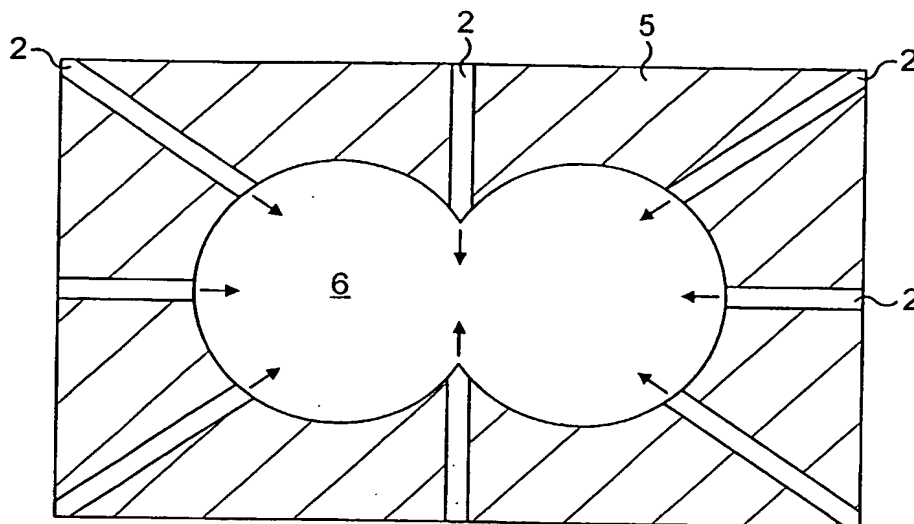


FIG. 3

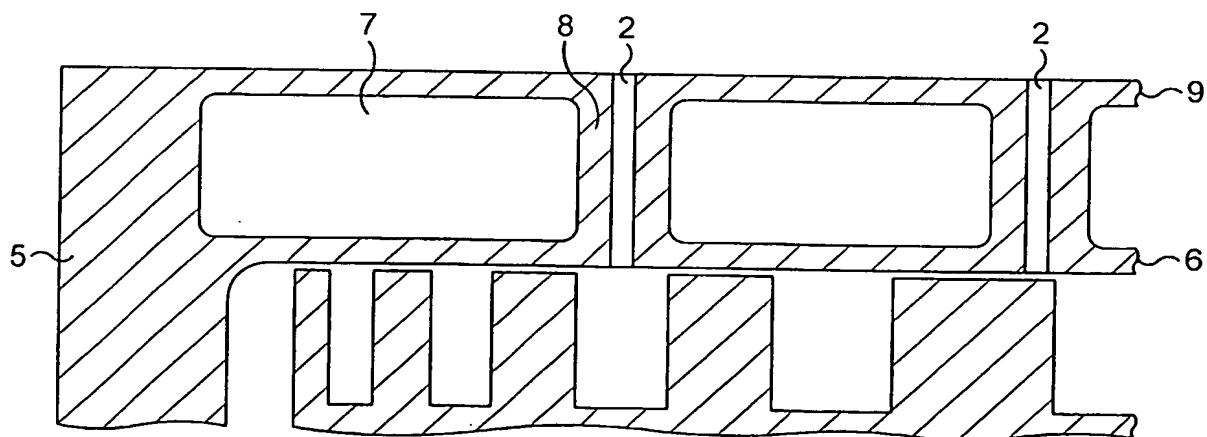


FIG. 4

1 / 3

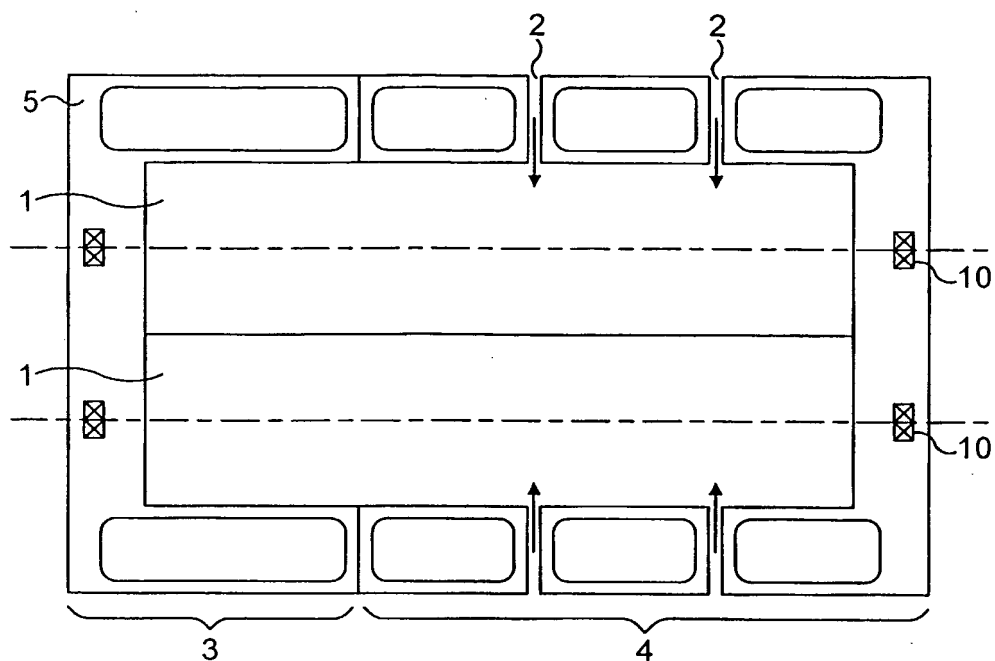


FIG. 1

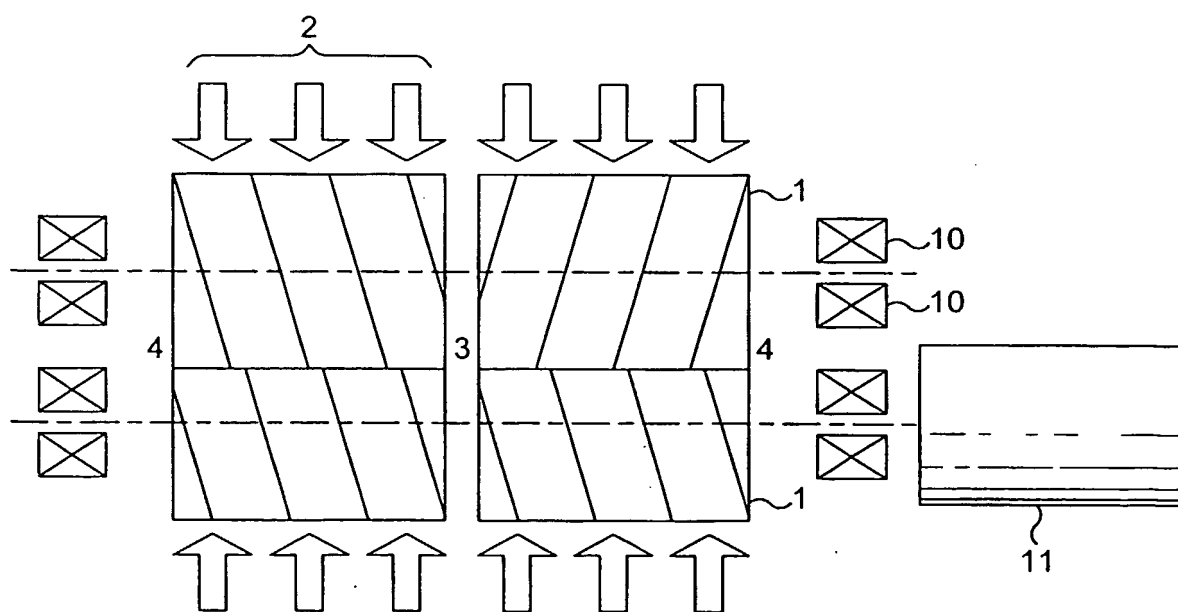


FIG. 2

36. A method for managing deposits within a pump mechanism by introducing fluid suitable for dissolving, diluting or otherwise disengaging deposits which have accumulated on the internal working surfaces of the pump, the method comprising the steps of (a) monitoring the performance of the pump, (b) calculating the rate of accumulation of deposits on the internal working surfaces of the pump based on the monitored performance, (c) calculating a fluid flow rate required to compensate for the accumulation of deposits as determined in step (b), and (d) effecting an adjustment of the flow rate of fluid being delivered to the rotor to reflect the calculated value from step (c).
37. A method according to Claim 35 or 36, wherein the pump is inoperative as the fluid is delivered, the method comprising the step of applying torque to rotors of the pump to overcome any remaining impeding force.
38. A method according to Claim 37, comprising the steps of introducing a thermal fluid into a cavity provided within the housing of the pump, the cavity encircling the rotors, and heating the thermal fluid in the cavity to raise the temperature of the fluid and the deposits sufficiently to release the deposits prior to the torque applying step.
39. A computer program which, when installed on a computer, causes the computer to perform the method of any of claims 22 to 38.
40. A computer readable carrier medium which carries a computer program as claimed in claim 39.
41. A computer readable carrier medium according to claim 40, wherein the medium is selected from; a floppy disk, a CD, a mini-disc or digital tape.

28. A method according to any of Claims 22 to 25, wherein the fluid is a gas.
29. A method according to Claim 26, wherein the fluid is steam.
- 5 30. A method according to any of Claims 22 to 29, wherein the fluid comprises a reactive substance for reacting with the particulates.
- 10 31. A method for managing deposits within a pump, the pump comprising a rotor element and a stator element, and a housing enclosing the elements and having at least one port; the method comprising injecting, into the housing via said at least one port, a fluid comprising a reactive substance for reacting with particulates located on the element surfaces to enable said particulates to be removed therefrom.
- 15 32. A method according to Claim 30 or 31, wherein the fluid comprises a halogen, such as fluorine.
- 20 33. A pump according to any of Claims 30 to 32, wherein the fluid comprises one of ClF_3 , F_2 , and NF_3 .
34. A method according to any of Claims 22 to 33, wherein the fluid is injected at predetermined intervals during operation.
- 25 35. A method according to any of Claims 22 to 34, comprising the steps of:
- 30 (a) monitoring the performance of the pump;
- (b) determining the accumulation of deposits on the internal element surfaces based on the monitored performance;
- (c) calculating a fluid flow rate required to compensate for the accumulation of deposits as determined in step (b); and
- (d) adjusting the flow rate of injected fluid to reflect the calculated value from step (c).

20. A pump according to any of Claims 17 to 19, wherein the fluid comprises one of ClF_3 , F_2 , and NF_3 .
- 5 21. Chemical vapour deposition apparatus comprising a process chamber and a pump according to any preceding claim for evacuating the process chamber, wherein, in use, the deposits are a by-product of a chemical vapour deposition process.
- 10 22. A method of managing deposits within a pump, the pump comprising a rotor element and a stator element, and a housing enclosing the elements and having an inlet for receiving pumped fluid, and downstream from the inlet, at least one port, the method comprising injecting, into the housing via said at least one port, fluid
15 for acting on deposits located on the element surfaces to enable said deposits to be removed therefrom.
23. A method according to Claim 22, wherein fluid is injected from a plurality of said ports.
- 20 24. A method according to Claim 23, wherein the ports are located radially about the housing.
- 25 25. A method according to any of Claims 22 to 24, wherein the ports are located along the length of the rotor element.
26. A method according to any of Claims 22 to 25, wherein the fluid is a liquid.
- 30 27. A method according to any of Claims 22 to 26, wherein the fluid is a solvent for dissolving particulates collected on the rotor element when the pump is in use.

10. A screw pump according to Claim 9, wherein the at least one port is located after the first two complete turns of thread of the rotor elements from the inlet.
- 5 11. A pump according to any of claims 1 to 8, wherein the pump is a claw pump.
12. A pump according to any of claims 1 to 8, wherein the pump is a Roots pump.
- 10 13. A pump according to any preceding claim, wherein the fluid is a liquid.
14. A pump according to any preceding claim, wherein the fluid is a solvent for dissolving particulates collected on the rotor element when the pump is in use.
- 15 15. A pump according to any of Claims 1 to 12, wherein the fluid is a gas.
- 20 16. A pump according to Claim 15, wherein the fluid is steam.
17. A pump according to any of Claims 1 to 15, wherein the fluid comprises a reactive substance for reacting with the particulates.
- 25 18. A pump comprising a rotor element and a stator element; a housing enclosing the elements and having at least one port; and means for injecting, into the housing via said at least one port, a fluid comprising a reactive substance for reacting with particulates located on the element surfaces to enable said particulates to be removed therefrom.
- 30 19. A pump according to Claim 17 or 18, wherein the fluid comprises a halogen, such as fluorine.

Claims

1. A pump comprising a rotor element and a stator element; a housing enclosing the elements and having an inlet for receiving pumped fluid, and downstream from the inlet, at least one port; and means for injecting, into the housing via said at least one port, fluid for acting on deposits located on the element surfaces to enable said deposits to be removed therefrom.
2. A pump according to Claim 1, comprising a plurality of said ports.
3. A pump according to Claim 2, wherein the ports are located radially about the housing.
4. A pump according to Claim 2 or 3, wherein the ports are located along the length of the rotor element.
5. A pump according to any preceding claim, wherein at least one of the ports includes a nozzle through which, in use, fluid is sprayed.
6. A pump according to Claim 5, wherein the nozzle is integrally formed within the port.
7. A pump according to any preceding claim, wherein the housing comprises a two skinned wall, a cavity being formed between an inner skin and an outer skin of the wall, through which, in use, a liquid may be passed.
8. A pump according to claim 7, wherein the inner skin of the housing provides the stator element.
9. A pump according to any preceding claim, wherein the pump is a screw pump comprising two threaded rotor elements.

acts as the stator of the pump. A cavity 7 is provided between the layers 6, 9 of the housing 5 such that a cooling fluid, such as water, can be circulated around the stator in order to conduct heat away from the working section of the pump. This cavity 7 is provided over the entire length of the rotor i.e. over the inlet region 3 as well as the exhaust region 4. Under circumstances where the pump has become seized due to cooling of the rotor which, in turn, solidifies residues on the surfaces between the rotor and the stator, the 'cooling liquid' in the cavity 7 of the housing 5 may be heated to raise the temperature of the rotor 1. This can enhance the pliability of the residue and may assist in releasing the mechanism. The housing 5 is provided with pillars 8 of solid material through the cavity 7 in order to provide regions where injection ports 2 can be formed.

The present invention is not restricted for use in screw pumps and may readily be applied to other types of pump such as Northey ("claw") pumps or Roots pumps.

In summary, a pump comprises at least one rotor 1, a stator 5 and a housing 5, the rotor 1 being enclosed by the housing 5. The housing 5 comprises at least one port 2 extending through the housing 5 to enable delivery of a fluid directly onto a surface of the at least one rotor 1.

It is to be understood that the foregoing represents just a few embodiments of the invention, others of which will no doubt occur to the skilled addressee without departing from the true scope of the invention as defined by the claims appended hereto.

to either soften or dissolve them, the shaft may then be rotated either by using the motor or manually to release the components without applying excessive, potentially damaging, force to the rotor.

Delivery of fluid may be performed through simple ports as liquid is drip-fed
5 through a hole in the housing or nozzles may be provided through which the fluid may be sprayed. Control systems may be introduced such that the solvent delivery can be performed in reaction to the changing conditions being experienced within the confines of the pump apparatus. For example, in the arrangement shown in Figure 5, a control system 20 supplies cleaning fluid,
10 for example, stage by stage, to the ports 2 of pump 21 via supply conduits 22. As indicated at 24, a purge gas system may also be provided for supplying a purge gas, such as nitrogen to the pump 21.

Where the process material is waxy or fatty, compatible solvents will need to
15 be introduced to perform the dilution/cleaning function. Such solvents may be provided in liquid or vapour form. Any compatible, effective cleaning medium may be used such as xylene in the case of hydrocarbon based/soluble products or water in the case of aqueous based / soluble products, alternatively, detergents may be used.

20 Where the process material is a by-product of a CVD process, the cleaning fluid may comprise a fluorinated gas. Examples of such cleaning fluid include, but are not restricted to, ClF_3 , F_2 , and NF_3 . The high reactivity of fluorine means that such gases would react with the solid by-products on the
25 pump mechanism, in order to allow the by-products to be subsequently flushed from the pump with the exhausted gases. To avoid corrosion of internal components of the pump by the fluorinated gases, materials need to be carefully selected for use in forming components of the pump, such as the rotor and stator elements, and any elastomeric seals, which would come into
30 contact with the cleaning gas.

The housing 5 as illustrated in Figure 3 is provided as a two-layer skin construction, an inner layer 6 and an outer layer 9. It is the inner layer 6 that

injected during operation, in order to limit the impact on pump performance. If, for example, a single port was to be used at the inlet 3 of the pump, this may have a detrimental effect on the capacity of by-products that could be transported away from the evacuated chamber (not shown) by the pump. By
5 bringing solvent into contact with the rotor 1 after the first few turns of the thread, the likelihood of backward contamination of the solvent into the chamber will be reduced.

Furthermore, where solvent is introduced in the inlet region of the pump, the pressure is such at the inlet that there is an increased risk that the solvent will
10 flash. In processes where it is necessary for the solvent to remain in liquid phase the solvent must be introduced closer towards the exhaust region of the pump where the pressures will have risen. As solvent is introduced through a number of ports 2 along the length of the stator, the overall effect is to gradually increase the quantity of solvent present, as the likelihood of residue
15 build up on the rotor 1 increases towards the exhaust stages. An additional benefit may be seen in some configurations where addition of liquid into the final turns of thread of the rotor will act to seal the clearances between the rotor and the stator in this region of the pump. Thus leakage of gas will be substantially reduced and performance of the pump will be improved.

20 In some processes, it is not appropriate to introduce solvent during operation as the waste products from the evacuated chamber are collected at the outlet of the pump for a particular purpose and this material ought not to be contaminated. Other applications may not result in levels of residue that warrant constant injection of solvent during operation. In these cases, and
25 where an unplanned shut down of the pump occurs such that standard practices, such as purging, are not followed, the residue from the process cools down as the apparatus drops in temperature. In these circumstances a seizure of the mechanism may occur as deposits build up and become more viscous or solidify. In a system according to the present invention, the
30 injection ports 2 can be used to introduce a solvent into the stator cavity 6 in a distributed manner without needing to go to the expense or inconvenience of disassembling the apparatus. Once the solvent has acted upon the deposits

An example of the present invention will now be described with reference to the accompanying drawings in which:

Figure 1 illustrates a schematic of a screw pump of the present invention;

5

Figure 2 illustrates a schematic of a double-ended screw pump of the present invention;

Figure 3 is an end sectional view of the pump of Figures 1 and 2;

10

Figure 4 is a detailed view of a section of a water jacket that illustrates the implementation of an injection port; and

Figure 5 illustrates an arrangement for supplying fluid to a pump

Whilst the example pumps illustrated in Figures 1 and 2 are screw pumps it is envisaged that this invention can be applied to any type of vacuum pump, in particular claw pumps.

15

In the example of Figure 1, two rotors 1 are provided within an outer housing 5 that serves as the stator of the pump. The two contra-rotating, intermeshing rotors 1 are positioned such that their central axes lie parallel to one another.

20

The rotors are mounted through bearings 10 and driven by a motor 11 (shown in Figure 2). Injection ports 2 are provided along the length of the rotor, in the examples of Figures 1 and 2 (shown as solid lines in Figure 3) these ports 2 are located laterally within the pump on the opposite side of the rotors from the intermeshing region of the rotors. However, the ports may be positioned at any radial location around the stator 5. Some of these locations are illustrated in Figure 3.

25

The ports 2, which may contain nozzles to allow the fluid to be sprayed, are preferably distributed along the length of the stator component 5 such that the solvent or steam can be easily applied over the entire rotor. Alternatively, this distribution of ports allows the fluid to be readily concentrated in any particular problem area that may arise. This is especially important when solvent is

30

According to the present invention there is further provided a method for managing deposits within a pump mechanism by introducing fluid suitable for dissolving, diluting or otherwise disengaging deposits which have accumulated on the internal working surfaces of the pump, the method

5 comprising the steps of:

(a) monitoring the performance of the pump, for example, by recording at least one of the group of rotor speed, power consumption, and volumetric gas flow rate;

10 (b) calculating the rate of accumulation of deposits on the internal working surfaces of the pump based on the monitored performance;

(c) calculating a fluid flow rate required to compensate for the accumulation of deposits as determined in step (b); and

(d) effecting an adjustment of the flow rate of fluid being delivered to the rotor to reflect the calculated value from step (c).

15 The pump may be inoperative as the fluid is delivered, for example where seizure has occurred or where cleaning needs to take place. In this case, the method may further involve applying torque to the rotors of the pump in order to overcome any remaining impeding force potentially caused by deposits located on the internal working components of the pump. Under certain
20 conditions, for example where the material being transported is particularly viscous or waxy and this viscosity may reduce with an increase in temperature, the method may further involve the introduction of thermal fluid into a cavity provided within the housing of the pump, where this cavity encircles the rotor components. This thermal fluid may be heated in order to
25 raise the temperature of the fluid and the deposits sufficiently to release the deposits prior to applying the torque as discussed above.

The controller of the dry pump apparatus may comprise a microprocessor which may be embodied in a computer, which in turn is optionally programmed by computer software which, when installed on the computer,
30 causes it to perform the method steps (a) to (d) mentioned above. The carrier medium of this program may be selected from but is not strictly limited to a floppy disk, a CD, a mini-disc or digital tape.

The fluid may comprise a halogen, for example fluorine, and may be a fluorinated gas, such as a perfluorinated gas. Examples of such fluid include ClF_3 , F_2 , and NF_3 .

5 The invention thus extends to chemical vapour deposition apparatus comprising a process chamber and a pump according to any preceding claim for evacuating the process chamber, wherein, in use, the deposits are a by-product of a chemical vapour deposition process.

10 According to the present invention there is further provided a method of managing deposits within a pump, the pump comprising a rotor element and a stator element, and a housing enclosing the elements and having an inlet for receiving pumped fluid, and downstream from the inlet, at least one port, the method comprising injecting, into the housing via said at least one port, fluid for acting on deposits located on the element surfaces to enable said deposits to be removed therefrom.

15 The present invention also provides a method for managing deposits within a pump, the pump comprising a rotor element and a stator element, and a housing enclosing the elements and having at least one port; the method comprising injecting, into the housing via said at least one port, a fluid comprising a reactive substance for reacting with particulates located on the
20 element surfaces to enable said particulates to be removed therefrom.

The delivery of fluid may occur at predetermined intervals during operation of the pump, for example, using solenoid valve control. Furthermore a monitoring step may be performed wherein the performance of the pump is monitored, for example, by measuring at least one of the group of rotor speed,
25 power consumption, and volumetric gas flow rate. These measured parameters may be used to determine the extent of accumulation of deposits on the internal working surfaces of the pump. A fluid flow rate may then be calculated, this rate being that of the delivered fluid that would be sufficient to compensate for the quantity of accumulated deposits as determined above.
30 Subsequently, the flow rate of fluid being delivered to the rotor may be adjusted to reflect the new calculated value.

fluid injected on the rotor and stator elements can be directly injected into the swept volume to impinge on the surfaces of these elements. This can significantly improve cleaning efficiency in comparison to a system where the cleaning fluid is introduced via the housing inlet for pumped fluids. Where
5 many ports are provided, these may be located in an array. For example, the ports may be located radially about the housing, and/or may be located along the length of the rotor element.

The housing may comprise an inner layer and an outer layer between which a cavity may be formed. In operation of the pump a liquid may be passed
10 through this cavity. The inner layer of the housing may act as the stator of the pump.

The port may include a nozzle through which, in use, fluid is sprayed, this nozzle may be integrally formed within the port.

The pump may be a screw pump comprising two threaded rotors in which
15 case the port(s) may be located after the first two complete turns of thread of the rotors from the inlet end of the rotor. Alternatively the pump may be a Northey ("claw") pump or a Roots pump.

The fluid may be a liquid or a vapour. The fluid may be a solvent for
20 dissolving residue collected on the rotor when the pump is in use or it may be steam. The fluid may comprise a reactive substance for reacting with the deposits, and may comprise, for example, a halogen. Such fluid can be particularly useful as a cleaning fluid when the pump is used as part of a CVD process to remove solid by-products of the CVD process.

25 Thus, the present invention also provides a pump comprising a rotor element and a stator element; a housing enclosing the elements and having at least one port; and means for injecting, into the housing via said at least one port, a fluid comprising a reactive substance for reacting with particulates located on
30 the element surfaces to enable said particulates to be removed therefrom.

spikes in the current demand on the motor of the vacuum pump. If this continues unabated, then this build-up of solid material can eventually cause the motor to become overloaded, and thus cause the control system to shut down the vacuum pump. Should the pump be allowed to cool down to ambient temperature, then this accumulated material will become compressed between the rotor and stator elements. Due to the relatively large surface area of potential contact that this creates between the rotor and stator elements, such compression of by-product material can increase the frictional forces opposing rotation by an order of magnitude.

10 In order to release the rotors in prior art pumps, a facility is provided whereby a bar can be inserted into sockets attached to the primary shaft of the rotor through an access panel. This bar is used as a lever to try to rotate the shaft and release the mechanism such that the machine can be restarted. This levering system allows more rotational force to be applied to the internal components than could be exerted by the motor. Such force will be transmitted to the rotor vanes and the associated stresses may prove to be detrimental to the structure of the rotor. If this system fails to release the mechanism it is then necessary to disassemble the apparatus such that a liquid solvent can be poured into the pump casing to dissolve the residue to a level where the shaft can be rotated manually. This disassembly not only causes the pump to be off line for a certain length of time, but it then must be re-commissioned and re-tested to ensure the reliability of the connections to the surrounding apparatus.

25 It is an aim of the present invention to overcome the aforementioned problems associated with pump technology.

The present invention provides a pump comprising a rotor element and a stator element; a housing enclosing the elements and having an inlet for receiving pumped fluid, and downstream from the inlet, at least one port; and means for injecting, into the housing via said at least one port, fluid for acting on deposits located on the element surfaces to enable said deposits to be removed therefrom. As the port(s) are located downstream of the inlet, any

ROTARY PISTON VACUUM PUMP WITH WASHING INSTALLATION

This invention relates to the field of vacuum pumps. In particular, but not strictly limited to vacuum pumps with a screw type configuration.

Screw pumps usually comprise two spaced parallel shafts each carrying
5 externally threaded rotors, the shafts being mounted in a pump housing such that the threads of the rotors intermesh. Close tolerances between the rotor threads at the points of intermeshing and with the internal surface of the pump body, which typically acts as a stator, causes volumes of gas being pumped
10 between an inlet and an outlet to be trapped between the threads of the rotors and the internal surface and thereby urged through the pump as the rotors rotate.

Screw pumps are widely regarded as a reliable means for generating vacuum conditions in a multitude of processes. Consequently, they are being applied to an increasing number of industrial processes. Such applications may
15 involve materials that have "waxy" or "fatty" properties e.g. tallow based plasticisers. In operation of the pump, these products form deposits on the surfaces of the pump. On shutdown of the pump these surfaces cool, the deposits also cool and solidify within the pump. Where such deposits are located in clearance regions between components, they can cause the pump
20 to seize up such that restart is inhibited or even prevented.

Similar problems can be encountered in a number of semiconductor processes that use vacuum pumps, especially those in the chemical vapour deposition (CVD) category. Such processes can produce a significant amount of by-product material. This can be in the form of powder or dust,
25 which may remain loose or become compacted, or in the form of hard solids, especially if the process gas is condensable and sublimes on lower temperature surfaces. This material can be formed in the process chamber, in the foreline between the chamber and the pump, and/or in the vacuum pump itself. If such material accumulates on the internal surfaces of the
30 pump during its operation, this can effectively fill the vacant running clearance between the rotor and stator elements on the pump, and can also cause



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number
WO 2004/036047 A1

(51) International Patent Classification⁷: **F04C 29/00**,
29/10, 25/00

(21) International Application Number:
PCT/GB2003/004330

(22) International Filing Date: 6 October 2003 (06.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0223767.5 14 October 2002 (14.10.2002) GB
0322238.7 23 September 2003 (23.09.2003) GB

(71) Applicant (for all designated States except US): **THE BOC GROUP PLC** [GB/GB]; Chertsey Road, Windlesham, Surrey GU20 6HJ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HOPE, Mark,**

Christopher [GB/GB]; 79 Elmside, New Addington, Croydon, Surrey CR0 9DU (GB). **TUNNA, Clive, Marcus, Lloyd** [GB/GB]; Pendle Cottage, The Street, Bolney, West Sussex RH17 5QW (GB). **UNDERWOOD, Frederick, John** [GB/GB]; 3 Bramber Avenue, Storrington, West Sussex RH20 4HZ (GB).


(74) Agent: **BOOTH, Andrew, Steven**; The Boc Group Plc, Chertsey Road, Windlesham, Surrey GU20 6HJ (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: ROTARY PISTON VACUUM PUMP WITH WASHING INSTALLATION

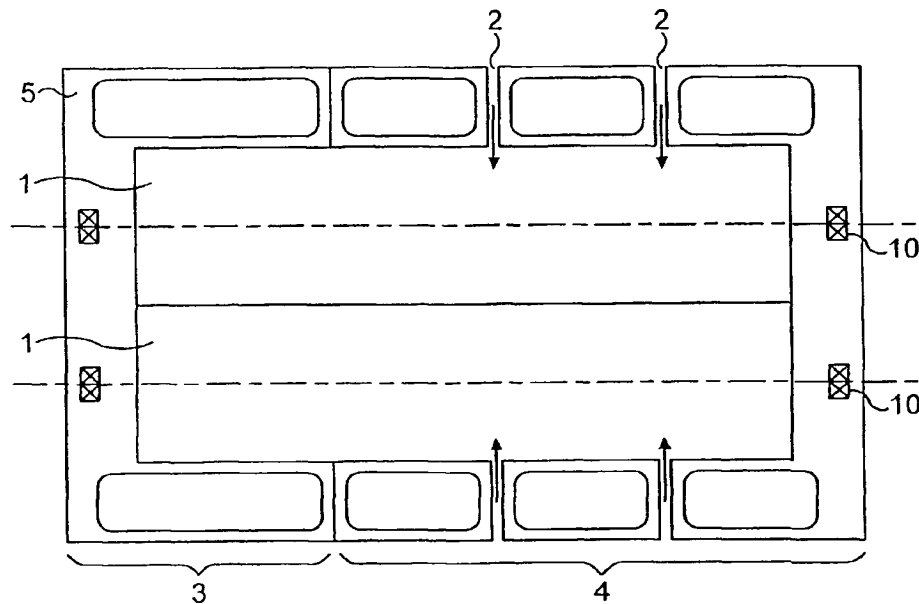

(57) Abstract: A pump comprises at least one rotor (1), a stator (5) and a housing (5), the rotor (1) being enclosed by the housing (5). The housing (5) comprises at least one port (2) extending through the housing (5) to enable delivery of a fluid directly onto a surface of the at least one rotor (1).

WO 2004/036047 A1